



FRP WALL LOUVER QUOTE REQUEST/ORDER FORM

SHEET _____ OF _____ DATE _____

PREPARED BY _____

COMPANY NAME _____

PHONE _____ FAX _____

JOB NAME _____

CONTACT NAME _____

OWNER _____

CUSTOMER P.O. _____

TAG LOCATION _____

WALL MATERIAL MASONRY STEEL
 CONCRETE WOOD OTHER: _____

WALL THICKNESS _____

WALL OPENING

OPENING WIDTH: _____ IN.

OPENING HEIGHT: _____ IN.

COLOR CHECK ONE

F.D.A. WHITE STD

CUSTOM _____


CAMEL TAN STD

TWO-TONE


LIGHT GRAY STD

CP® OPTIONAL COLOR _____


LOUVER TYPE CHECK ONE

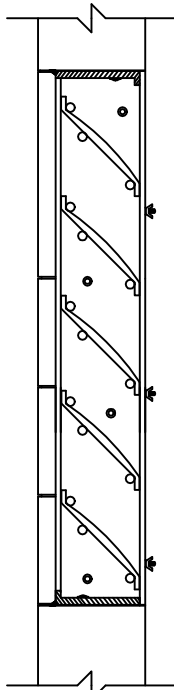


45° FIXED LOUVER BLADES

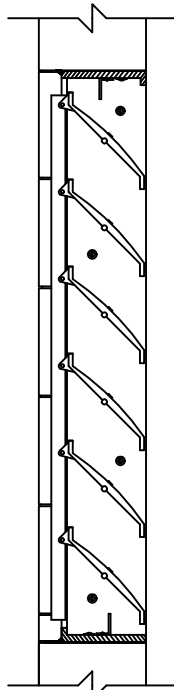

45° ADJUSTABLE LOUVER BLADES

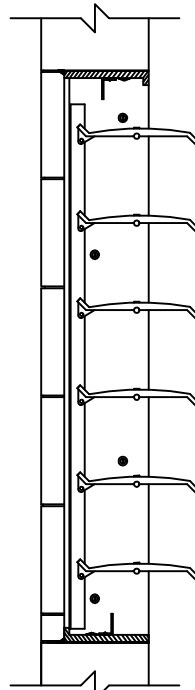

90° ADJUSTABLE LOUVER BLADES

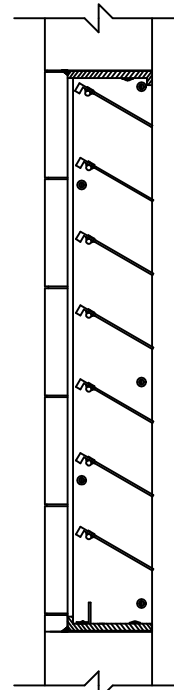

BACKDRAFT DAMPER LOUVER

OTHER OPTIONS CHECK REQUIRED

PLASTIC BIRDSCREEN

PLASTIC BUGSCREEN

DRIP CAP

STAINLESS STEEL BIRDSCREEN

STAINLESS STEEL BUGSCREEN

NOTE: THE MAXIMUM SIZE OF A MODULE IS 48"x96" HIGH. MINIMUM IS 24"x24". FOR PLANNING PURPOSES 48"x48" IS A USEFUL STANDARD. LARGER OPENINGS WILL REQUIRE ARRAYS OF LOUVERS. BETWEEN EACH LOUVER MODULE SHOULD BE A STRUCTURAL MEMBER OR SUBFRAME, TO WHICH THE INTERMEDIATE MODULES CAN BE ATTACHED. UNUSUALLY HIGH WIND LOADS MAY REQUIRE SPECIAL ATTENTION TO STRUCTURAL SUPPORTS. STRUCTURAL SUPPORTS AND MOUNTING ACCESSORIES ARE NOT SUPPLIED AS STANDARD.

1-800-444-6924 / FAX: (956) 544-7943

WEBSITE: WWW.CHEM-PRUF.COM

E-MAIL: INFO@CHEM-PRUF.COM