




Any Size! Any color! No corrosion/rust!

Chem-Pruf®
P.O. Box 4560 Brownsville, TX 78523
Phone: 1-800-444-6924
Fax: 956/544-7943
E-mail: info@chem-pruf.com

Norton®

CLOSER WITH BUILT IN STOP AND HOLD OPEN

7500 CLP-T AL

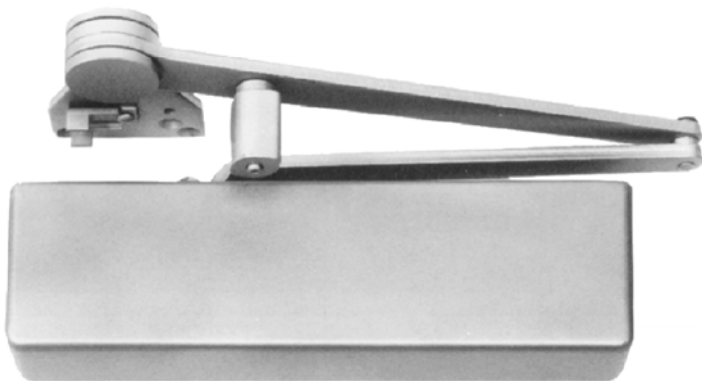

THUMBTURN SELECTED
HOLD-OPEN AND STOP

FEATURES & CERTIFICATIONS

- Norton 7500 CloserPlus provides the control of a full feature door closer plus a positive door stop and is adjustable in a 2-6 size range.

- Aluminum Alloy Shell: Series 7500 closer bodies are constructed of a special aluminum alloy, carefully selected to accommodate individual closer characteristics and operating conditions.

- Door Stop: Steel arm detent reveted to soffit plate, permits a door swing to within 2° of nominal template opening.

- All CloserPlus Door Controls have independent valves for sweep speed, latch speed, and backcheck cushioning.

- Closer will be surface mounted (Parallel Arm Only) with stainless steel thru-bolts and sex nuts.

- Closers are installed at 110° unless otherwise specified.

- Thumbturn operated hold-open engages/disengages hold-open

